

# Specifications Guide

## UVB Ballasts

### UVB264T5-425-MV-RS



Lamp Type /Catalog #	Manufacturer	Power (W)	Current (mA)
G64T5L/4P Long life	Light Sources	75	425
G36T5L/4P Long life	Light Sources	45	425
GPH1554T5L	Light Sources	75	425
TUV64 4P-SE T5	Philips	75	425
G64T5L/4	Heraeus	75	425
G64T5L/C	First Light	75	450

### Ballast Specifications

**Ballast type:** Rapid Start (RS)  
**Number of lamps:** 2  
**Normal input voltage:** 120-277V, +/-10%, 50/60 Hz  
**Input current:** 1.50A(120V)/0.68A(277V)  
**Input current THD:** < 10%  
**Input power:** 175W @ full load  
**Approvals:** UL/cUL Listed, Class "P", Outdoor, Type 1

**Operating frequency:** > 20kHz  
**Lamp current crest factor:** 1.7 or less  
**Power factor:** > 95%  
**Efficiency:** > 90%  
**Ambient temperature:** 0-40°C  
**Case maximum temperature:** 75°C  
**Sound rating:** "A"  
**Weight:** 5.20 lbs

### Wiring Diagram and Dimensions

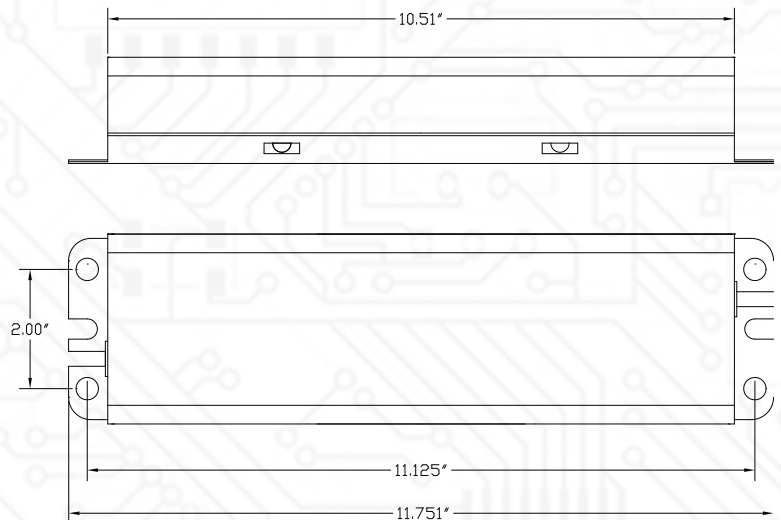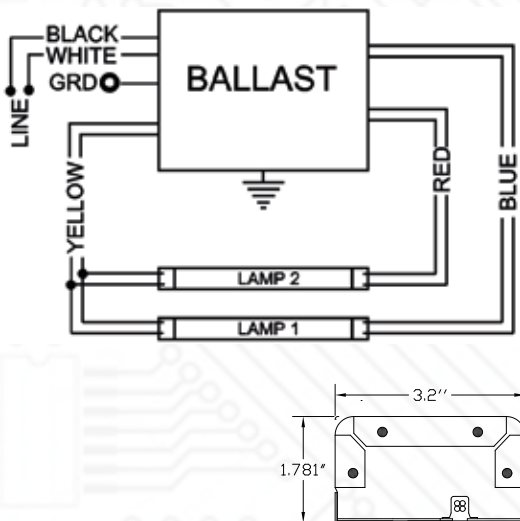

**Allanson**  
 LIGHTING TECHNOLOGIES



33 Cranfield Road, Toronto, ON M4B 3H2

www.allanson.com | cservice@allanson.com | T: 1.800.661.7251 | F: 416.752.6717