

Specifications Guide

UVB Ballasts

UVB464T5-425-MV-RS



Lamp Type /Catalog #	Manufacturer	Power (W)	Current (mA)
G64T5L/4P Long life	Light Sources	75	425
G36T5L/4P Long life	Light Sources	45	425
GPH1554T5L	Light Sources	75	425
TUV64 4P-SE T5	Philips	75	425
G64T5L/4	Heraeus	75	425
G64T5L/C	First Light	75	450

Ballast Specifications

Ballast type: Rapid Start (RS)
Number of lamps: 2 or 4
Normal input voltage: 120-277V, +/-10%, 50/60 Hz
Input current: 3.0A(120V)/1.38A(277V)
Input current THD: < 10%
Input power: 355W @ full load
Approvals: UL/cUL Listed,
 Class "P", Outdoor, Type 1

Operating frequency: > 20kHz
Lamp current crest factor: 1.7 or less
Power factor: > 95%
Efficiency: > 90%
Ambient temperature: 0-40°C
Case maximum temperature: 75°C
Sound rating: "A"
Weight: 8.15 lbs

Wiring Diagram and Dimensions

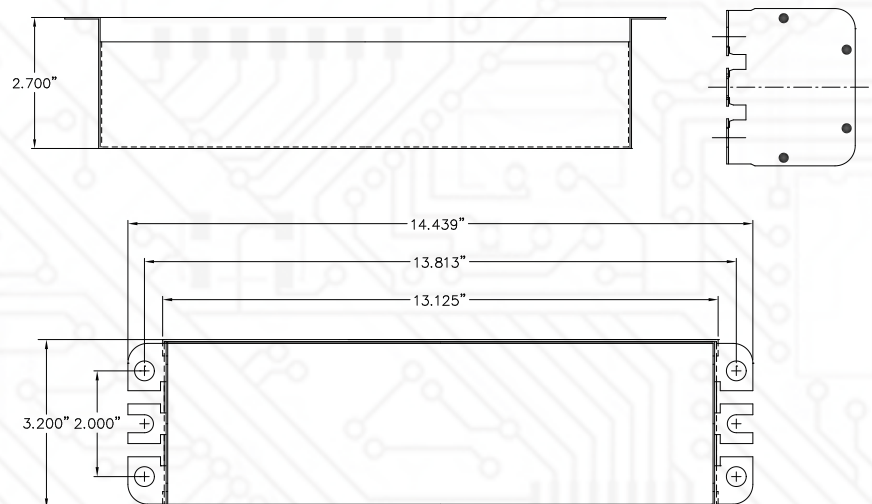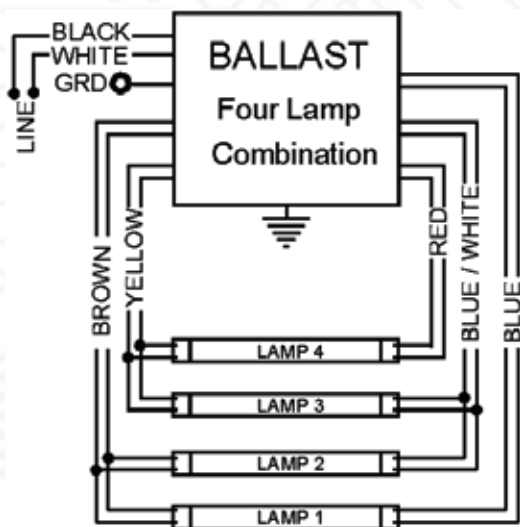

Allanson
 LIGHTING TECHNOLOGIES



33 Cranfield Road, Toronto, ON M4B 3H2

www.allanson.com | cservice@allanson.com | T: 1.800.661.7251 | F: 416.752.6717