

UVB248T6-2200-MV-PCB

Amalgam	Lamp Type /Catalog #	Manufacturer	Power (W)	Current (A)
	NNI 200/108	Heraeus	165	2.2
	NNI 80/61	Heraeus	120	1.8
	NIQ 170/90	Heraeus	140	2
	NIQ 200/120	Heraeus	210	1.85
	TUV180W XPT	Philips	180	2.1
	TUV200W XPT	Philips	200	2.1
	GPHHA1004T6L	Light Sources	210	2


Ballast Specifications

Ballast type: Program Start (PS)
Number of lamps: 2
Normal input voltage: 120-240V, +/-10%, 50/60 Hz
Input current: 3.60A(120V)/1.80A(240V)
Input current THD: < 10%
Input power: 430W @ full load
Power factor: > 95%
Approvals: UL/cUL Recognized, Class "P",
 Outdoor, Type 1

Operating frequency: > 25kHz
Lamp current crest factor: 1.7 or less
Efficiency: > 90%
Ambient temperature: 0-40°C
Sound rating: "A"
Weight: 2.5 lbs

Wiring Diagram and Dimensions

Dimensions: 8.0" (L) x 6.0" (W) x 2.75" (H)

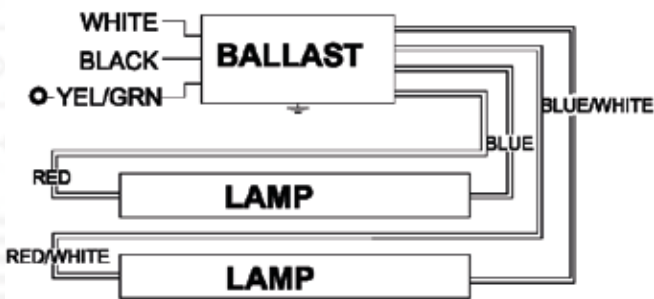

Allanson
LIGHTING TECHNOLOGIES

