

Specifications Guide

UVB Ballasts

UVB264T6-1400-230V

Amalgam



Lamp Type /Catalog #	Manufacturer	Power (W)	Current (A)
GA64T5L	First Light	190	1.20
GA36T5L	First Light	105	1.20
GPHA1554T5L	Light Sources	190	1.20
GPHA1000T5L	Light Sources	127	1.20
NNI 120/84	Heraeus	100	1.40
NNI 60/35	Heraeus	70	1.40

Ballast Specifications

Ballast type: Instant Start (IS)
Number of lamps: 2
Normal input voltage: 230V, +/-10%, 50/60 Hz
Input current: 1.60A
Input current THD: < 10%
Input power: 350W @ full load
Approvals: UL/cUL Listed Recognized, Class "P", Outdoor, Type 1

Operating frequency: > 25kHz
Lamp current crest factor: 1.7 or less
Power factor: > 95%
Efficiency: > 90%
Ambient temperature: 0-45°C
Case maximum temperature: 75°C
Sound rating: "A"
Weight: 8.15 lbs

Wiring Diagram and Dimensions

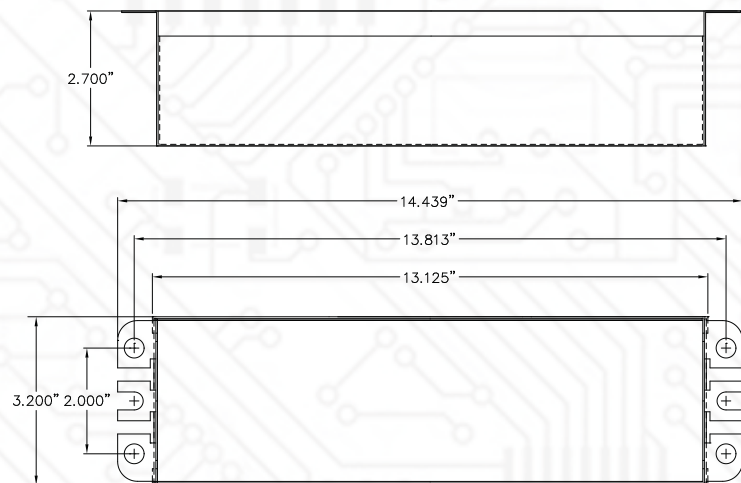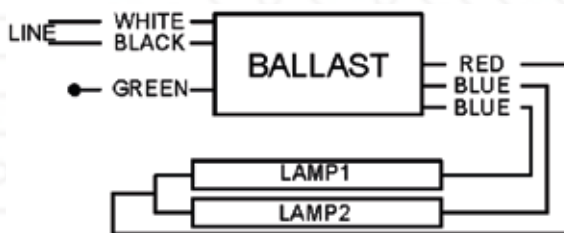

Allanson
LIGHTING TECHNOLOGIES



33 Cranfield Road, Toronto, ON M4B 3H2

www.allanson.com | cservice@allanson.com | T: 1.800.661.7251 | F: 416.752.6717